

LED 3-Wattage Semi Cutoff Wall Pack

The NuGem LED 3-Wattage Semi Cutoff Wall Pack, Select (3-Wattages), 135 lm/W, IP65 Wet Location Rated, Dimmable + Smart Ready

FEATURES

Lumen Output	5850 to 15600 lumens
Efficacy	135 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
CCT	4000K or 5000K
Rating	IP65 Wet Location
Warranty	5 Years

APPLICATIONS

Premium outdoor luminaire suitable for wall mounting on building exteriors for entrances, courtyards, alleys, and pedestrian walkways.

CONSTRUCTION

Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. IP65 Wet Location rated for dust-tight, water jets: IEC 60529.

ELECTRICAL

Input voltages 120-277V models with 0-10V Continuous Dimming. Includes 3X-Wattage Tuning Switches inside housing. Operating temperatures -4°F to 113°F (-20°C to 45°C).

MOUNTING

Wall mounted installations. Includes Mounting Level inside housing.

OPTICS

Anti-UV Clear Prismatic Tempered Glass Lens.

CONTROLS

Fixture integrated Button Photocell sensor available.

LISTINGS

DLC Premium listed. UL certified to meet US and Canadian standards. FCC and RoHS compliant.

WARRANTY

5 year exclusive limited warranty. View complete product warranty information <https://etheriumled.com/warranty/>.

Project:
Date:
Catalog No:
Prepared By:

80W Max and 120W Max Tunable Models





Includes Mounting Level and Silicone Water Repellent Ring



CORRELATED COLOR TEMPERATURES (CCT)

4000K

5000K



SPECIFICATIONS

ENERGY DATA

Input Voltage: 120-277V
Input Frequency: 50/60 Hz
Wattage: Select (45W, 60W, 80W), (90W, 100W, 120W)
Power Factor: >0.9
Total Harmonic Distortion (THD): <20%
Operating Temperature: -4°F to 113°F (-20°C to 45°C)

LIGHTING DATA

Lumens: Select (6075, 8100, 10800), (12150, 13500, 16200)
Lumens Per Watt: 135 lm/W
Color Correlated Temperature (CCT): 4000K, 5000K
Dimmable: 0-10V
Color Rendering Index (CRI): >80
L70: 75000 hours

ORDERING INFORMATION

Model	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions	Weight
ETH-TWP-80W-G3-4000K	(45W, 60W, 80W)	120-277V	0.38A@120V, 0.16A@277V 0.50A@120V, 0.22A@277V 0.67A@120V, 0.29A@277V	6075 8100 10800	135 lm/W	4000K	0-10V	Dark Bronze	14.21"L x 9.27"W x 7.31"D	9.04 lbs
ETH-TWP-80W-G3-5000K	(45W, 60W, 80W)	120-277V	0.38A@120V, 0.16A@277V 0.50A@120V, 0.22A@277V 0.67A@120V, 0.29A@277V	6075 8100 10800	135 lm/W	5000K	0-10V	Dark Bronze	14.21"L x 9.27"W x 7.31"D	9.04 lbs
ETH-TWP-120W-G3-4000K	(90W, 100W, 120W)	120-277V	0.75A@120V, 0.32A@277V 0.83A@120V, 0.36A@277V 1.00A@120V, 0.43A@277V	12150 13500 16200	135 lm/W	4000K	0-10V	Dark Bronze	14.21"L x 9.27"W x 7.31"D	9.96 lbs
ETH-TWP-120W-G3-5000K	(90W, 100W, 120W)	120-277V	0.75A@120V, 0.32A@277V 0.83A@120V, 0.36A@277V 1.00A@120V, 0.43A@277V	12150 13500 16200	135 lm/W	5000K	0-10V	Dark Bronze	14.21"L x 9.27"W x 7.31"D	9.96 lbs

Sensor

PC INSTALLED - Button Photocell Sensor
(Blank) None

ORDERING GUIDE


ETH	TWP	80W	G3	5000K	PC
ETH	Group	Max Wattage	Form Factor	CCT	Sensor



PHYSICAL DIMENSIONS

All Models

14.21"L x 9.27"W x 7.31"H

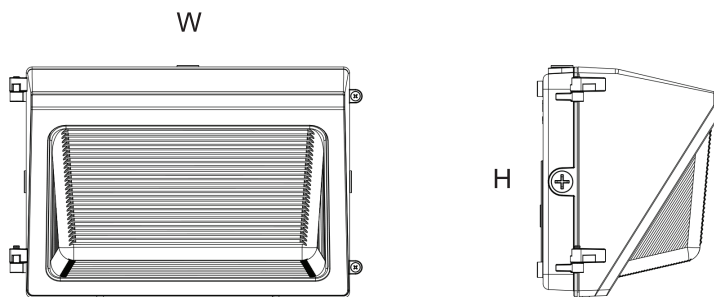

SHIPPING INFORMATION

Model	Unit Weight	Shipping Dimensions	Shipping Weight	Quantity /Box
80W Max	9.04 lbs	15.35"L x 11.42"W x 9.25"H	10.34 lbs	1
120W Max	9.96 lbs	15.35"L x 11.42"W x 9.25"H	11.27 lbs	1