

LED Adjustable Cutoff Wall Pack

3-Wattages + 3-CCT (30/40/50K), Wet Rated, 130 lm/W, Dimmable + Smart

FEATURES

Lumen Output	5200 to 10400 lumens
Efficacy	130 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
CCT	Select (3000K/4000K/5000K)
Rating	Wet Location
Warranty	5 Years

APPLICATIONS

Premium outdoor luminaire suitable for wall mounting on building exteriors for entrances, courtyards, alleys, and pedestrian walkways.

CONSTRUCTION

Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. Wet Location rated.

ELECTRICAL

Input voltages 120-277V models with 0-10V Continuous Dimming. Tunable 3-CCT (3000K, 4000K, 5000K) and Tunable 3-Wattages. Operating temperatures -40°F to 113°F (-40°C to 45°C).

MOUNTING

Wall mounted installations.

OPTICS

Anti-UV Clear Prismatic Tempered Glass Lens. Adjustable vertical beam position.

CONTROLS

Installed fixture integrated Photocell sensor available.

LISTINGS

DLC Premium listed. UL certified to meet US and Canadian standards. FCC and RoHS compliant.

WARRANTY


5 year exclusive limited warranty.

Project:
Date:
Catalog No:
Prepared By:

3-Wattage and 3-CCT Models



TUNABLE CORRELATED COLOR TEMPERATURES (CCT)

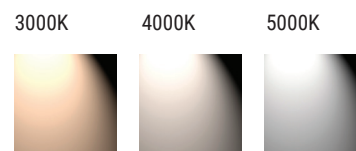

SPECIFICATIONS

ENERGY DATA

Input Voltage: 120-277V
Input Frequency: 50/60 Hz
Wattage: 3-Wattages (120W Max)
Power Factor: >0.9
Total Harmonic Distortion (THD): <15%
Operating Temperature: -40°F to 113°F (-40°C to 45°C)

LIGHTING DATA

Lumens: 5200 to 10400
Lumens Per Watt: 130 lm/W
Correlated Color Temperature (CCT): 3-CCT (30K, 40K, 50K)
Dimmable: 0-10V
Color Rendering Index (CRI): >70
L70: 50000 hours

ORDERING INFORMATION

Model	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
WK06-120/100/80W-H-TCP(XX)-Y	80W	120-277V	0.73A@120V, 0.32A@277V	5200	130 lm/W	(3000K, 4000K, 5000K)	0-10V	Bronze	14.21"L x 9.27"W x 7.31"D
	100W		0.92A@120V, 0.40A@277V	7800					
	120W		1.10A@120V, 0.48A@277V	10400					

Control

PCB [INSTALLED] Integrated Photocell Sensor

PHYSICAL DIMENSIONS

All Models

14.21"L x 9.27"W x 7.31"D

