

LED Gas Station Canopy Light

Wet Rated, 135 lm/W, Dimmable

FEATURES

Lumen Output	20250 lumens
Efficacy	135 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
CCT	5700K
Rating	Wet Location
Warranty	5 Years

APPLICATIONS

Premium outdoor luminaire for surface mounting in ceiling spaces less than 25 feet. Suitable for gas station canopies.

CONSTRUCTION

Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. Wet Location rated.

ELECTRICAL

Input voltages 120-277V with 0-10V Continuous Dimming. Single wattage and single CCT. Operating temperatures -40°F to 113°F (-40°C to 45°C).

MOUNTING

Surface mounted installation. Includes a 6-Inch 5 core, 18AWG wiring cable.

OPTICS

Anti-UV Clear Glass Lens for 110° Beam Angle.

LISTINGS

DLC Premium listed. UL certified to meet US and Canadian standards. FCC and RoHS compliant.

WARRANTY

5 year exclusive limited warranty.

Project:

Date:

Catalog No:

Prepared By:

150W Models

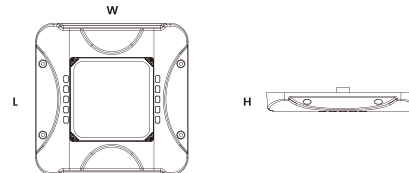


CORRELATED COLOR TEMPERATURE (CCT)

5700K



PHYSICAL DIMENSIONS

All Models 16.54"L x 16.54"W x 2.64"H

SPECIFICATIONS

ENERGY DATA

Input Voltage: 120-277V**Input Frequency:** 50/60 Hz**Wattage:** 150W**Power Factor:** >0.9**Total Harmonic Distortion (THD):** <15%**Operating Temperature:** -40°F to 113°F (-40°C to 45°C)

LIGHTING DATA

Lumens: 20250**Lumens Per Watt:** 135 lm/W**Correlated Color Temperature (CCT):** 5700K**Dimmable:** 0-10V**Color Rendering Index (CRI):** >70**L70:** 50000 hours

ORDERING INFORMATION

Model	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
GS0515-150W-5700K	150W	120-277V	1.38A@120V, 0.60A@277V	20250	135 lm/W	5700K	0-10V	White	16.54"L x 16.54"W x 2.64"H

Visit us: etheriumled.com