

LED T8 4-FT Tube

3-Wattages + 5-CCT (35/40/50/57/65K), Damp Rated, 150 lm/W, G13, Type B, Single or Double Ended Power

FEATURES	
Lumen Output	1500 to 3000 lumens
Efficacy	150 lm/W
Input Voltage	120-277V
Driver	Type B (Internal Driver)
Installation	Single or Double Ended Power
Dimmable	No
Size	4-FT
CCT	Select (3500K/4000K/5000K/5700K/6500K)
Rating	Damp Location
Warranty	5 Years

APPLICATIONS

Premium indoor replacement emergency lamp intended to replace 4 foot T8 or T12 fluorescent lamps with G13 end caps for linear lamp fixtures. Suitable for use in linear troffers, wraparounds, and shop lights.

CONSTRUCTION

Manufactured for durability and heat dissipation using aluminum sheet backing. Damp Location rated.

ELECTRICAL

Input voltage 120-277V models. Type B, to operate without a ballast. Single or Double Ended Power installations for G13 end caps. Tunable 5-CCT (3500K, 4000K, 5000K, 5700K, 6500K) and Tunable 3-Wattages. Operating temperatures -4°F to 113°F (-20°C to 45°C).

MOUNTING

Replacement lamp twist-locks into existing linear T8 lamp fixture.

OPTICS

Shatter resistant anti-UV Frosted Polycarbonate Lens.

CONTROLS

Compatible with ON/OFF occupancy sensors.

LISTINGS

DLC listed. ETL certified to meet US and Canadian standards. FCC and RoHS compliant.

WARRANTY

5 year exclusive limited warranty.

Project:
Date:
Catalog No:
Prepared By:


4-FT Tunable Models



3-Wattages and 5-CCT Tuning Switches



TUNABLE CORRELATED COLOR TEMPERATURES (CCT)

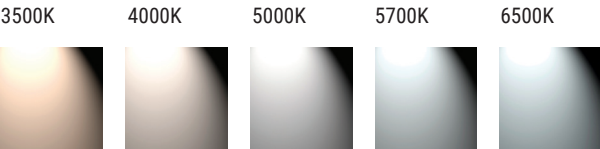

SPECIFICATIONS

ENERGY DATA

Input Voltage: 120-277V
Input Frequency: 50/60 Hz
Wattage: 3-Wattages (14W Max, 18W Max, 20W Max)
Power Factor: >0.9
Total Harmonic Distortion (THD): <15%
Operating Temperature: -4°F to 113°F (-20°C to 45°C)

LIGHTING DATA

Lumens: 1500 to 3000
Lumens Per Watt: 150 lm/W
Correlated Color Temperature (CCT): 5-CCT (35K, 40K, 50K, 57K, 65K)
Dimmable: Type B (No)
Color Rendering Index (CRI): 83
L70: 50000 hours

ORDERING INFORMATION

Model	Size	Type	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
4F143W5CB02	4-FT	G13	(10W, 12W, 14W)	120-277V	0.09A@120V, 0.04A@277V 0.11A@120V, 0.05A@277V 0.13A@120V, 0.06A@277V	1500	150 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	No	White	47.13"L x 1.14"W x 1.29"H
DLC:						1800					
4T8A10D02						2100					
4T8A12D02											
4T8A14D02											
4F183W5CB02	4-FT	G13	(12W, 14W, 18W)	120-277V	0.11A@120V, 0.05A@277V 0.13A@120V, 0.06A@277V 0.17A@120V, 0.07A@277V	1800	150 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	No	White	47.13"L x 1.14"W x 1.29"H
DLC:						2100					
4T8A12D02						2700					
4T8A14D02											
4T8A18D02											
4F203W5CB02	4-FT	G13	(14W, 18W, 20W)	120-277V	0.13A@120V, 0.06A@277V 0.17A@120V, 0.07A@277V 0.18A@120V, 0.08A@277V	2100	150 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	No	White	47.13"L x 1.14"W x 1.29"H
DLC:						2700					
4T8A14D02						3000					
4T8A18D02											
4T8A20D02											

PHYSICAL DIMENSIONS

4-FT Models

47.13"L x 1.14"W x 1.29"H

